


Patent Abstracts of Japan

TITLE : HUMIDIFYING DEVICE FOR FUEL CELL

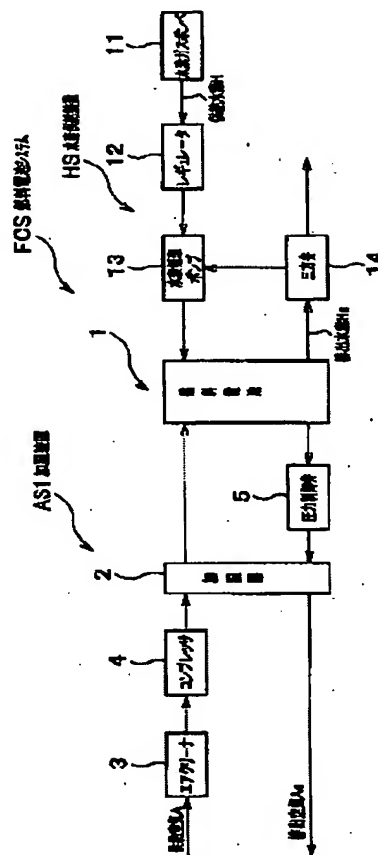

SOLUTION: With the humidifying device AS1, a pressure control valve 5 is arranged at a downstream side of a channel for exhaust air Ae discharged from the fuel cell 1 and a humidifier 2 is arranged at a downstream side of the pressure control valve 5. In other words, the pressure control valve 5 is arranged at an upstream side of the humidifier 2. With this, the humidifier need not be put under high pressure even if the pressure of the fuel cell 1 is controlled by the pressure control valve 5, and therefore, moisture contained in the exhaust air can be transformed into vapor in more volume.

COPYRIGHT: (C)2002,JPO